

Centon



Gusto

series Instant Water Heater **GT331**



Export
Excellence
Award
2019

Image for illustration purposes only.
Please consult a certified plumber and obey all building regulations.



SIRIM

Suruhanjaya Tenaga

MADE IN MALAYSIA

Full Specifications



Stepless Electronic Control

Allows users to make fine power adjustment to produce desired shower temperature.



Built-in Residual Current Device (RCD)

Automatically Power supply cuts off in the event of current leakage.



Built-in Flow Sensor

Cuts off power in the event water flow is less than the rated flow.



Double Function Thermostat

Protects from the risk of scalding in case of overly high temperature.



Splash Proof Casing

Protection against water jet spray from all possible directions.



Built-in Voltage Surge Protector

Protects internal electrical circuit from electrical surges and voltage spikes, including those caused by lightning.



UK Technology Heating Element

Advanced heating technology providing users with instant hot shower water flow, with a guaranteed 5-year warranty.



Unlimited Capacity Hot Water Supply

Tankless instantaneous water heater technology provides on-demand constant supply of hot water instantly.



Triple Function Right Angle Stop Valve

Smooth 90° water flow control valve with regulator and built-in mesh filter to prevent foreign particles from flowing into the heating element, causing unwanted damages / blockages.



This model is strictly for open outlet application only



DOUBLE FUNCTION THERMOSTAT
Maintains safe water output temperature at all times.



SPLASH PROOF CASING
Protects electrical components against water jet spray.



RCD
Cuts off power supply in the event of current leakage.



FLOW SENSOR
Prevents overheating due to insufficient water supply.



ISOLATION BARRIERS
Placed at both inlet and outlet to remove direct conduction path that leads to electrocution hazard

PENTAFECTA Centon
5-POINT SAFETY SYSTEM BY

Distributed by

CENTON HOME APPLIANCES SDN. BHD. [1289180-P]

21, Jalan Seruling 58, Taman Klang Jaya,
41200 Klang, Selangor, Malaysia

+603 3324 7605 / 7606

+603 3324 7608

support@centon.my

www.centon.my

Technical Data

Heater Electrical Rating

3kW - 5.5kW, 220-240Vac, 50Hz

Min. Water Flow Rate

~2.5 litre / min

Max. Water Pressure

0.38Mpa (3.8bar / 55psi)

Water Temp. Control

Electronic Control

Water Connection

15mm dia. (1/2" BSP)


Heater Dimensions

190mm (W) x 308mm (L) x 88mm (H)

Heater Weight

1.05kgs

Shower Set

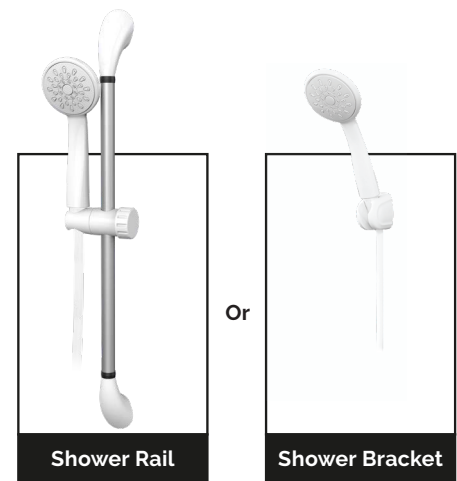

e-Warranty System

Register & check for remaining warranty period ONLINE

10 YEARS

Anti-Leak Tank

5 YEARS

Heating Element

1 YEAR

Other Electrical & Electronic Parts



FIND IT ONLINE AT

Centon.my

f o /centonmy